




RoHS

IP30

RAL

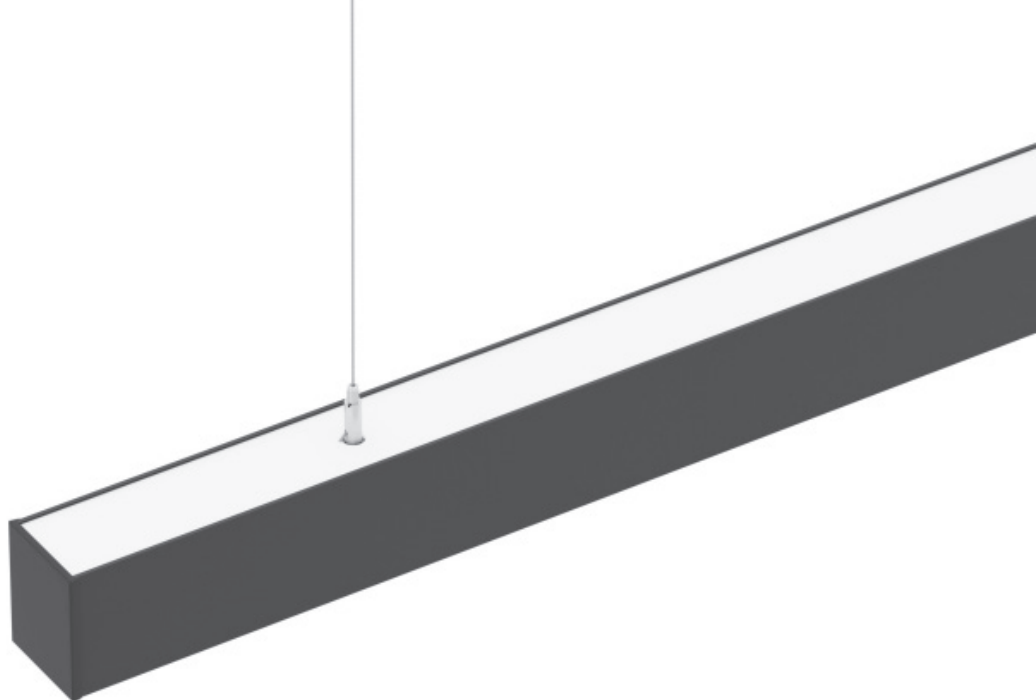

on request

INDI X

L80 B10 > 54 000h | SDCM 3 | LLMF 85% | CRI 80-90+

PRODUCT NAME	POWER CONSUMPTION (OPQ/HEX/PAR)	LUMEN OUTPUT (OPQ/HEX/PAR)*	EFFICACY (OPQ/HEX/PAR)*	PRODUCT SIZE	ORDER REFERENCE
INDI X 40	39/39/42W	3920/4100/4840 Lm	101/105/115 lm/W	1085 x 57 x 75 mm	INDX40
INDI X 60	58/58/59W	6110/6370/7260 Lm	105/110/123 lm/W	1625 x 57 x 75 mm	INDX60
INDI X 80	77/77/73W	8190/8560/9880 Lm	106/111/135 lm/W	2170 x 57 x 75 mm	INDX80

*Values are given for colour temperature of 4000K, CRI 80 and may vary for other options

MATERIALS

CASING - electrostatically painted aluminium; standard colour - grey

DIFFUSER - OPQ-Opal/Polycarbonate, HEX-Micro-prismatic/PMMA, PAR-Parabolic Louvers/Aluminium

INSTALLATION

Suspended

ORDER CODE

COLOUR TEMPERATURE

3000K 3K

4000K 4K

DRIVER TYPE

Standard ST

Dimming - DALI DL

DIFFUSER

Micro-prismatic HEX

Opal OPQ

Parabolic Louvers PAR

CASING COLOUR

Grey GR

White WH

Black BL

Custom RAL

EMERGENCY MODULE*

3 hr EM

ADD-ONS

Motion Sensor MS

CRI

≥ 90 C90



THROUGH WIRING**


5-phase through wiring TW5

*Not available for INDI X 40

**Available on request

Order code example:
INDX60-4K-ST-HEX-GR-EM





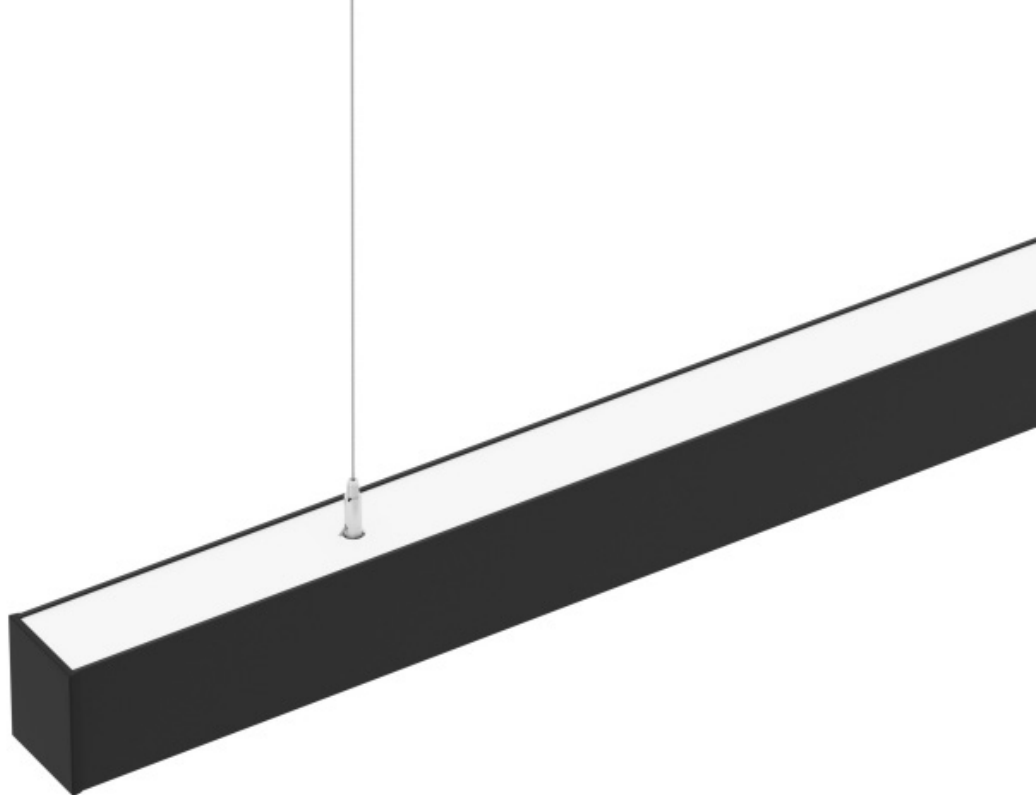

INDI X

FIXINGS

	INFO	CODE
End Cap	Single/Metal*	INDI-ENDCAP
	Single/PC	INDI-ENDCAP-S
Joints	Inline	INDI-JOINT-I
	Corner 90°*	INDI-JOINT-C
	T-joint*	INDI-JOINT-T
	For mounting reinforcement	INDIX-JOINT-TOP
Suspension Kit	Simple INOX	ZLISS-INOX
	Electrical*	ZLISS-SUSP



*Any RAL colour option available. Order example: **INDI-JOINT-C-GR**