

FLYLINE IP

L80 B10 > 54 000h | SDCM3 | LLMF 85% | CRI 80-90+

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	ORDER REFERENCE
FLYLINE IP 15	13W	1855 Lm	143 lm/W	615 x 65 x 86 mm	FLIP15
FLYLINE IP 20	19W	2775 Lm	146 lm/W	905 x 65 x 86 mm	FLIP20
FLYLINE IP 30	25W	3710 Lm	148 lm/W	1195 x 65 x 86 mm	FLIP30

*Values are given for colour temperature of 4000K, CRI 80 and may vary for other options

MATERIALS

CASING - electrostatically painted aluminum; standard colour - grey


DIFFUSER - OPQ-Opal/Polycarbonate

INSTALLATION

Into plaster-cardboard ceiling

FIXINGS

INFO	CODE
Joint Inline set	FLIP-JOINT-I

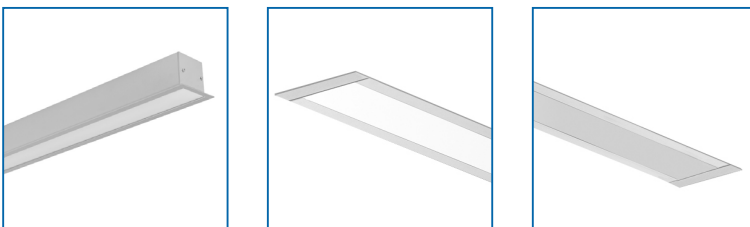

ORDER CODE

COLOUR TEMPERATURE	
3000K	3K
4000K	4K
DRIVER TYPE	
Standard	ST
Dimming - DALI	DL
CASING COLOUR	
Grey	GR
White	WH
Black	BL
Custom	RAL
EMERGENCY MODULE*	
3 hr	EM
ADD-ONS	
Motion Sensor	MS
CRI	
≥ 90	C90

*Only available in FLIP30 on request

Order code example: **FLIP15-4K-ST-GR**