

COFFEX ARC

L80 B10 > 72 000h | SDCM 3 | LLMF 85% | CRI 84

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT	EFFICACY	PRODUCT SIZE	COLOUR TEMPERATURE	ORDER REFERENCE
COFFEX ARC 15	14W	1220 Lm	87 lm/W	355 x 134 x 48 mm	3000K	CARC15
COFFEX ARC 15	14W	1260 Lm	90 lm/W	355 x 134 x 48 mm	4000K	CARC15

MATERIALS

CASING - powder painted steel sheet; standard colour - white

DIFFUSER - PC opal

INSTALLATION

Into modular ceilings 600x600 with a visible supporting structure

ORDER CODE

COLOUR TEMPERATURE

3000K 3K

4000K 4K

DRIVER TYPE

Standard ST

Dimming - DALI DL


CASING COLOUR

White WH

Grey GR

Black BL

Custom RAL

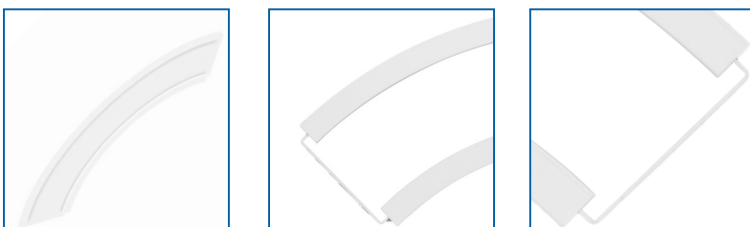

Order code example: **CARC15-4K-ST-WH**