

FLYLINE C

L80 B10 > 72 000h | SDCM 3 | LLMF 85% | CRI 84

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	COLOUR TEMPERATURE	ORDER REFERENCE
FLYLINE C 30	25W	2830 Lm	113 lm/W	585 x 73 x 75 mm	3000K	FLYC30
FLYLINE C 30	25W	2890 Lm	115 lm/W	585 x 73 x 75 mm	4000K	FLYC30

*Values are given for HEX diffuser and may vary for other options

FIXINGS

	INFO	CODE
End Cap	Single*	FLYL-ENDCAP
Joints	Inline Recessed	FLYL-JOINT-I
	Corner 90°*	FLYL-JOINT-C

*Any RAL colour option available. Order example: **FLYL-ENDCAP-GR**


MATERIALS

CASING - electrostatically painted aluminium; standard colour - grey

DIFFUSER - PMMA

INSTALLATION

Recessed into plaster-cardboard

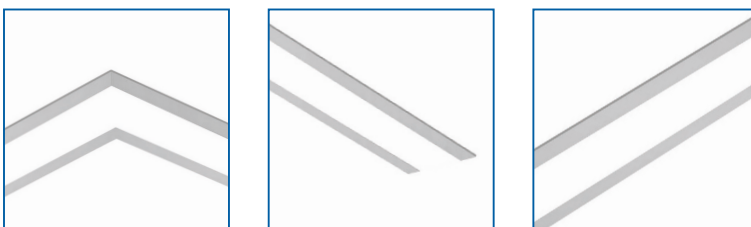

ORDER CODE

COLOUR TEMPERATURE	
3000K	3K
4000K	4K
DRIVER TYPE	
Standard	ST
Dimming - DALI	DL
DIFFUSER	
Microprismatic	HEX
Opal	OPQ
CASING COLOUR	
Grey	GR
White	WH
Black	BL
Custom	RAL

Order code example: **FLYC30-4K-ST-HEX-GR**