

## GEO CR X

L80 B10 > 72 000h | SDCM 3 | LLMF 85% | CRI 84

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	ORDER REFERENCE
GEO CR X S 125	124W	12400 Lm	100 lm/W	Ø 800 x 108 mm	GCXS125
GEO CR X L 195	200W	19490 Lm	97 lm/W	Ø 1200 x 108 mm	GCXL195

\*Values are given for 4000K colour temperature and may vary for other options

### MATERIALS

CASING - powder painted aluminium; standard colour - grey

DIFFUSER - opal

### INSTALLATION

Suspended

### ORDER CODE

#### COLOUR TEMPERATURE

3000K 3K

4000K 4K

#### DRIVER TYPE

Standard ST

Dimming - DALI DL


#### CASING COLOUR

Grey GR

White WH

Black BL

Custom RAL

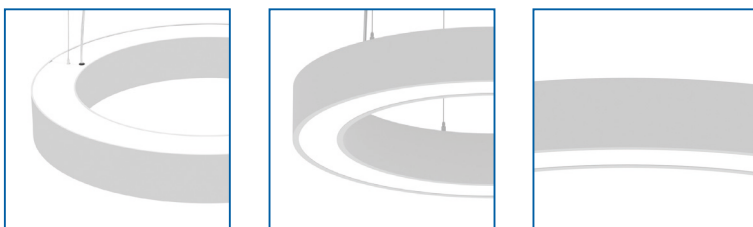

Order code example: **GCXS125-4K-ST-GR**