

GEO ARC

L80 B10 > 72 000h | SDCM 3 | LLMF 84% | CRI 84

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	INFO	ORDER REFERENCE
GEO ARC S 45	45W	4490 Lm	100 lm/W	Ø 800 x 100 x 62 mm	1/2-Ring-180°	GARS45
GEO ARC L 70	70W	7270 Lm	104 lm/W	Ø 1200 x 100 x 62 mm	1/2-Ring-180°	GARL70
GEO ARC XL 30	30W	2990 Lm	100 lm/W	Ø 2000 x 100 x 62 mm	1/8-Ring-45°	GAXL30
GEO ARC XL 40	40W	4060 Lm	102 lm/W	Ø 2000 x 100 x 62 mm	1/6-Ring-60°	GAXL40
GEO ARC XL 60	60W	6200 Lm	103 lm/W	Ø 2000 x 100 x 62 mm	1/4-Ring-90°	GAXL60

*Values are given for colour temperature of 4000K and may vary for other options

MATERIALS

CASING - powder painted aluminum profile; standard colour - grey

DIFFUSER - opal

INSTALLATION

Suspended

FIXINGS

	INFO	CODE
End Cap	Single/Metal*	GEO-ENDCAP
Joint	Inline	GEO-JOINT-I
Suspension Kit	Simple INOX	ZLISS-INOX
	Electrical*	ZLISS-SUSP

*Any RAL colour option available. Order example: **GEO-ENDCAP-GR**

ORDER CODE

COLOUR TEMPERATURE

3000K 3K

4000K 4K

DRIVER TYPE

Standard ST

Dimming - DALI DL


CASING COLOUR

Grey GR

White WH

Black BL

Custom RAL

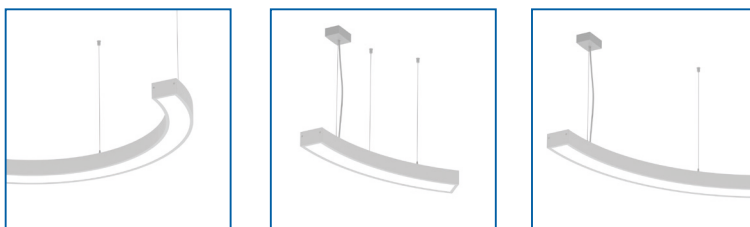

Order code example: **GARS45-4K-ST-BL**